

607

INDEX NO.

OVERGROUND HYDRANT BREAKABLE DN80 DOUBLE OR SINGLE CLOSING



APPLICATION

Waterworks and fire-fighting installations.


DESIGN FEATURES

- head, base - ductile iron EN GJS-500-7
- column:
 - 607A - carbon steel S235JR
 - 607B - stainless steel (0H18N9 / AISI 304 / 1.4301)
 - 607C - ductile iron (EN GJS-500-7 / 5.3200 / EN JS1030)
 - 607D - carbon steel S235JR hot dip galv.
- rolled stem made of stainless steel (2H13, AISI 420, 1.4021)
- protection against breaking
- stem seal - o-ring
- self - draining when fully closed
- rod:
 - column A, C, D - constructional steel with anti-corrosive coating or stainless steel
 - column B - stainless steel
- special A2 bolt at the breaking point
- double or single piston closing system
- closing pistons - ductile iron, fully vulcanised with EPDM
- internal elements may be replaced without the need to dig the hydrant out under pressure (with the gate valve fully open)
- corrosion protection:
 - external - polyester RAL3000, min. 250 µm, UV resistant
 - internal - epoxy coating approved for contact with drinking water
- rotating flange - for easier installation rotates 0° to 360°
- optionally - brass bushing at piston working location

TECHNICAL DATA / STANDARDS

- design, requirements, test methods, application acc. PN-EN 14339, PN-EN 1074-6
- material acc. PN-EN 1563, PN-79/H-74244, PN-EN 10088-1
- flange PN16 acc. PN-EN 1092-2
- base B75 acc. PN-M-51038
- operating wrench acc. PN-63/M-74085, DIN 3223

No.	Part	Material	Standard
1	Operating nut	EN GJS-500-7	PN-EN 1563
2	Cover	EN GJS-500-7	PN-EN 1563
3	Head	EN GJS-500-7	PN-EN 1563
4	Base 75	Ak-11 / Aluminium	PN-91/M-51038
5	Cover 75	Ak-11 / Aluminium	PN-91/M-51024
6	Top flange DN80	EN GJS-500-7	PN-EN 1563
7	Special bolt	A2	PN-EN ISO 4762
8	Washer	A2	PN-EN ISO 7089
9	Pin	Spring steel	PN-EN ISO 8752
10	Nut	A2	PN-EN ISO 4032
11	Bottom break-away flange DN80	EN GJS-500-7	PN-EN 1563
12, 13, 14	Underground column	S235JR / A2 / EN GJS-500-7 / S235JR hot dip galv.	PN-79/H-74244 PN-EN 10088-1 PN-EN 1563
15	Base	EN GJS-500-7	PN-EN 1563
16	Drainage plug	PE	PN-89/C-89286
17	Collet	Copper	PN-79/H92710
18	Half-ring	EN GJS-500-7	PN-EN 1563
19	Piston guide	PE	PN-89/C-89286
20	Slider spring	Steel	PN-EN 10088-1
21	Bottom closing piston DN80	EN GJS-500-7 + EPDM	PN-EN 1563 PN-EN 681-1
22	Top closing piston DN80	EN GJS-500-7 + EPDM	PN-EN 1563 PN-EN 681-1
23	Pin	Spring steel	PN-EN ISO 8752
24	Lower rod	S235JR / Zn5 / A2	PN-EN 10219-2 PN-EN 10088-1
25	Slider DN80	EN GJS-500-7	PN-EN 1563
26	Bolt Tr	1.4021	PN-EN 10088-1
27	Nut Tr	CW617N	PN-EN 12164
28	Lock	EN GJS-500-7	PN-EN 1563
29	Flexible pin	Spring steel	PN-EN ISO 8752
30	O-ring	EPDM	PN-EN 681-1
31	Distance bushing	1.4021	PN-EN 10219
32	Base	EN GJS-500-7	PN-EN 1563
33	Pin	Spring steel	PN-EN ISO 8752
34	Overground column	S235JR / A2 / EN GJS-500-7 / S235JR hot dip galv.	PN-79/H-74244 PN-EN 10088-1 PN-EN 1563
35	Top rod	S235JR / Zn5 / A2	PN-EN 10219-2 PN-EN 10088-1
36	O-ring	EPDM	PN-EN 681-1
37	Top end	1.4021	PN-EN 10088-1
38	Pin	Spring steel	PN-EN ISO 8752
39	O-ring	EPDM	PN-EN 681-1
40	Special seal	EPDM	PN-EN 681-1
41	Washer	1.4301	PN-EN 10088-1
42	Pin	Spring steel	PN-EN ISO 8752
43	Bolt	S235JR / Zn5	PN-EN ISO 4762

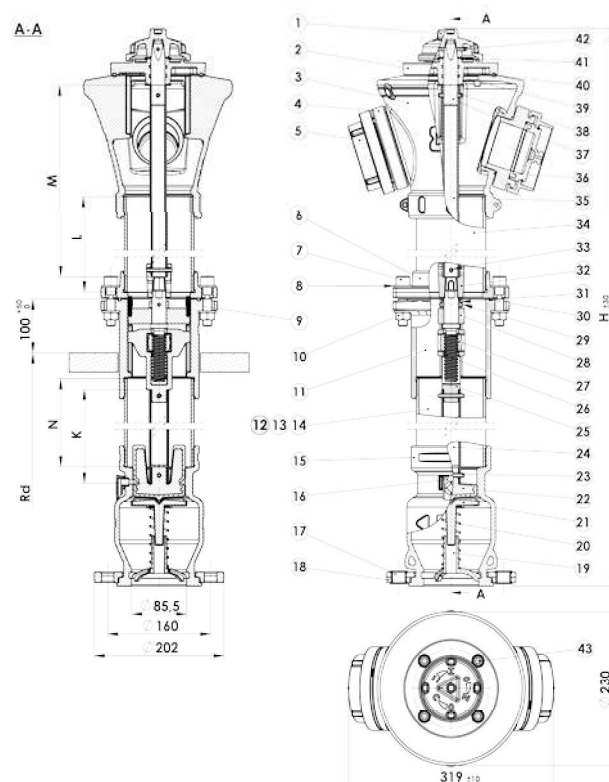

DN	Height H [mm]	Installation depth Rd [mm]	Weight [kg]
80	1950	1000	50,7
80	2150	1250	53,3
80	2350	1500	55,8