

804

INDEX NO.

FLANGED BEND Q 90°



APPLICATION

Waterworks, wastewater systems and other liquids chemically neutral.


DESIGN FEATURES

- diameter range DN80-DN300
- body - ductile iron EN GJS-500-7
- milled grooves in the face of the flange
- anticorrosion coating - epoxy RAL5005, min. 250 µm

TECHNICAL DATA / STANDARDS

- produced acc. PN-EN 545
- material acc. PN-EN 1563
- flange connections acc. PN-EN 1092-2
 - DN80-DN150: PN10/PN16
 - DN200-DN300: PN10*
- temperature range: 0°C / +50°C

*DN200-DN300 PN16 on request

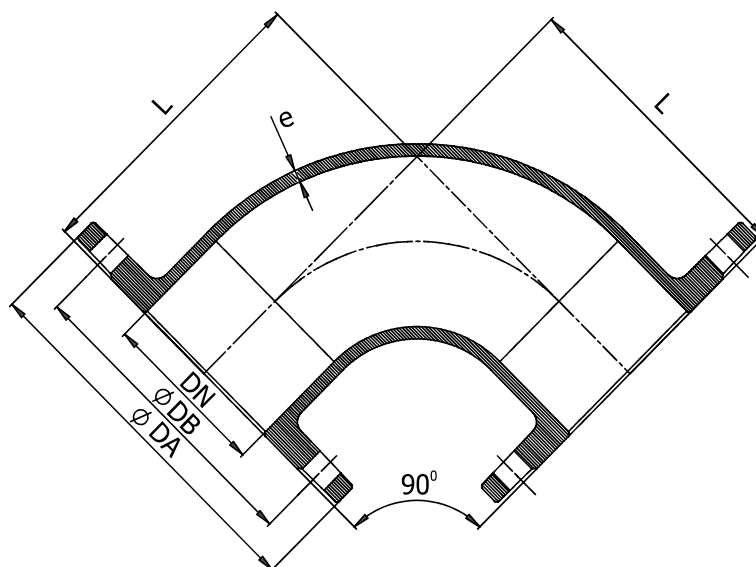

DN	e	L	PN10		PN16		Weight [kg]
			DA	DB	DA	DB	
80	7,0	165	200	160	200	160	9,7
100	7,2	180	220	180	220	180	11,9
150	7,8	220	285	240	285	240	21,0
200	8,4	260	340	295	340	295	33,6
250	9,0	350	395	350	405	355	52,0
300	9,6	400	565	515	460	410	84,0