

805

INDEX NO.

FLANGED BEND FFK 45°



APPLICATION

Waterworks, wastewater systems and other liquids chemically neutral.


DESIGN FEATURES

- diameter range DN80-DN300
- body - ductile iron EN GJS-500-7
- milled grooves in the face of the flange
- anticorrosion coating - epoxy RAL5005, min. 250 µm

TECHNICAL DATA / STANDARDS

- produced acc. PN-EN 545
- material acc. PN-EN 1563
- flange connection acc. PN-EN 1092-2
 - DN80-DN150: PN10/PN16
 - DN200-DN300: PN10*
- temperature range: 0°C / +50°C

*DN200-DN300 PN16 on request

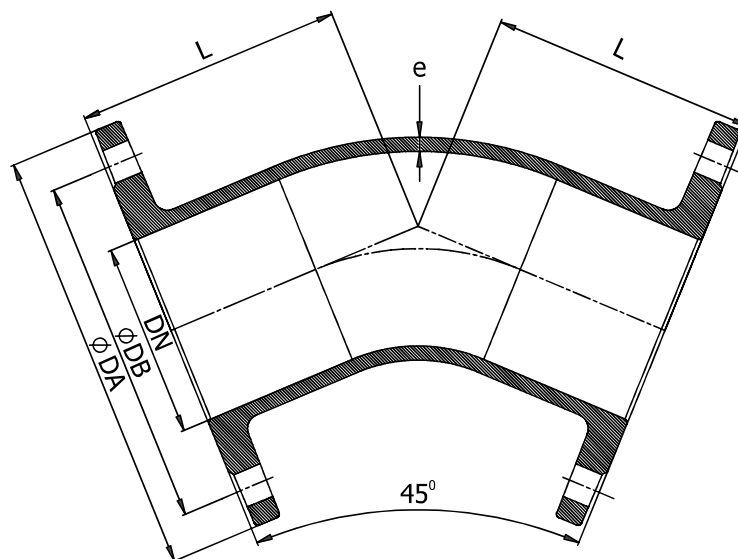

DN	e	L	PN10		PN16		Weight [kg]
			DA	DB	DA	DB	
80	7,0	130	200	160	200	160	9,3
100	7,2	140	220	180	220	180	11,3
150	7,8	160	285	240	285	240	19,0
200	8,4	180	340	295	340	295	28,0
250	9,0	350	400	350	400	355	62,0
300	9,6	400	565	515	460	410	78,0