

809

INDEX NO.

SINGLE FLANGED SPIGOT F

APPLICATION

Waterworks, wastewater systems and other liquids chemically neutral.

DESIGN FEATURES


- diameter range DN80-DN300
- body - ductile iron EN GJS-500-7
- milled grooves in the face of the flange
- anticorrosion coating - epoxy RAL5005, min. 250 µm

TECHNICAL DATA / STANDARDS

- produced acc. PN-EN 545
- material acc. PN-EN 1563
- flange connection acc. PN-EN 1092-2
 - DN80-DN150: PN10/PN16
 - DN200-DN300: PN10*
- temperature range: 0°C / +50°C

*DN200-DN300 PN16 on request



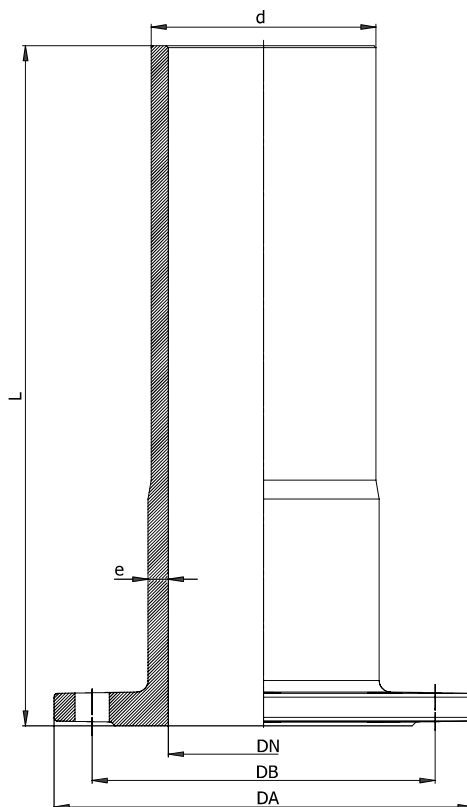

DN	d	e	L	PN10		PN16		Weight [kg]
				DA	DB	DA	DB	
80	98	7,0	350	200	160	200	160	8,5
100	118	7,2	360	220	180	220	180	11,0
150	170	7,8	380	285	240	285	240	18,0
200	222	8,4	400	340	295	340	295	24,5
250	274	9,0	420	400	350	400	355	40,0
300	326	9,6	440	455	400	455	410	52,0