

331

INDEX NO.

REDUCING PIPE COUPLING RRS-R



APPLICATION

Intended for mechanical connection of plain ends of pipes differing in diameters in waterworks, wastewater and other systems for liquids chemically neutral. Used for iron, steel, plastic, GRP and AC pipes.


DESIGN FEATURES

- diameter range 270-2000 mm
- coupling tolerance is ± 7 mm in relation to the outer pipe diameter
- pipe angular deflection up to $\pm 3^\circ$
- corrosion protection:
 - epoxy coating
 - optional: hot-dip galvanized
- EPDM gasket for potable water or NBR gasket for wastewater
- threaded galvanized pins, optional: hot-dip galvanized, stainless steel, acidresistant steel
- eyebolt
- possibility to design and produce a coupling according to individual customer needs: nonstandard height, made of different materials, e.g. stainless steel
- possibility of connecting various types of pipes even with very large reductions

TECHNICAL DATA / STANDARDS

- material acc. PN-EN 10020
- seal:
 - NBR: PN-EN 681-1
 - EPDM: WRAS, BS 6920-2, ACS
- nominal pressure:
 - PN10: DN250-2000
 - PN16: DN250-1200
- temperature range:
 - EPDM: -10°C / $+60^\circ\text{C}$
 - NBR: -20°C / $+80^\circ\text{C}$

No.	Name	Material	Standard
1	Body	S235JR / 0H18N9 / 0H17N12M2	PN-EN 10020
2	Nut	S235JR / Zn5 / A2 / A4	PN-EN ISO 4032
3	Threaded pin	S235JR / Zn5 / A2 / A4	DIN 975
4	Washer	S235JR / Zn5 / A2 / A4	PN-EN ISO 7089
5	Clamping rim	S355JR / 0H18N9 / 0H17N12M2	PN-EN 10020
6	Fixed rim	S355JR / 0H18N9 / 0H17N12M2	PN-EN 10020
7	Gasket	EPDM / NBR	PN-EN 681
8	Stepped segment	S235JR / 0H18N9 / 0H17N12M2	PN-EN 10020
9	Eyebolt	S235JR / Zn5 / A2	PN-EN 10020

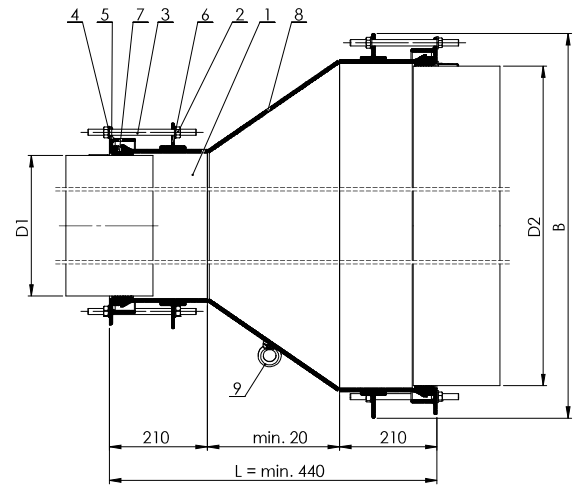

Outer pipe diameter	Outer pipe diameter	Length
D1 [mm]	D2 [mm]	L [mm]
270-2000	270-2000	440-1500